




TECHNICAL DATA SHEET

Planter Chains **40-1 41-1 50-1**

- **LOW MAINTENANCE**
- **FATIGUE RESISTANT**
- **SINGLE STRAND**
- **OEM SPECIFICATIONS**
- **GERMAN ASSEMBLY**

TAGEX Simplex Roller Chain and links are OEM rated, supplied riveted, shot-peened, pre-loaded and pre-lubricated. TAGEX Premium range is assembled in Germany, the NSR Standard range is manufactured to highest specifications.

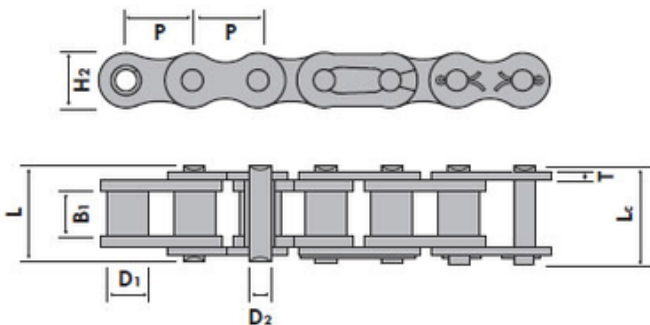

TAGEX
NSR®



SPECIFICATIONS:

ASA 40-1

- Pitch 12.7mm
- Roller Diameter - 7.95mm
- Width between inner plates - 7.85mm
- Pin Diameter - 3.96mm

ASA 41-1

- Pitch 12.7mm
- Roller Diameter - 7.77mm
- Width between inner plates - 6.25mm
- Pin Diameter - 3.58mm

ASA 50-1

- Pitch 15.875mm
- Roller Diameter - 10.16mm
- Width between inner plates - 9.4mm
- Pin Diameter - 5.08mm

5 Metre length with links + Extra links available. No returns on cut lengths of chain

JOHANNESBURG HEAD OFFICE: 011-621 8300 **EMAIL:** sales@tagex.co.za **WEBSITE:** www.tagex.co.za

LIMITED WARRANTY: Sellers sole liability of any claim shall be limited to replacement of defective or non conforming product - which does not include any consequential damages or losses whatsoever.